




**R15RFT Series
WR15 Scalar Network Analysis
50 to 75 GHz**

DESCRIPTION

The R15RFT & R15DET are elements that extend the frequency range of scalar network analyzers to WR-15 (50-75 GHz). These turnkey scalar systems contain filtered multipliers with -50 dBc spurious and harmonics. Included are a dual directional coupler and detectors for reference, reflection and transmission measurements.

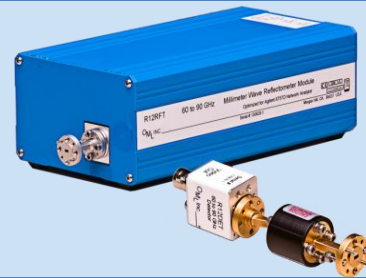

HIGHLIGHTS

- Full waveguide band coverage
- Scalar reflection and transmission measurements

APPLICATIONS

- Versatility to satisfy multiple applications
- Economic alternative to vector network analyzers

ELECTRICAL AND PERFORMANCE SPECIFICATIONS (+25°C)

After a one hour warm-up period, the R15RFT module will satisfy the following specifications.

Electrical Characteristics ¹	Description
Frequency Range	50 to 75 GHz
RF Input Frequency	12.5 to 18.75 GHz
RF Multiplication Factor	4
FL1 Frequency Range	50 to 75 GHz
FL2 Frequency Range	50 to 58 GHz
FL3 Frequency Range	57 to 75 GHz
FL4 Frequency Range	xx to xx GHz
RF Input Power	+7 dBm min / +10 dBm max.
RF Input Power Damage Level	+20 dBm
RF Input Return Loss	14 dB typ.
Test Port Output Power	+ 2 dBm typ. with F1 thru section installed / -2 dBm min.
Test Port Match	15 dB typ.
Spurs and Harmonics	-20 dBc typ. with FL1 thru section installed -50 dBc max. with Filters FL2, FL3 or FL4 installed
Reflectometer Coupler Directivity	35 dB typ.
Temperature	+ 20 to +30° C

Module Characteristics ¹	Description
Interface	
RF (Test Port) Output Flange	MIL-F-3922/67B-008 (UG 387/U)
RF Input	SMA(f)
Detector Output	BNC(f)
DC Input	7-pin Bayonet Circular Receptacle
DC Power	+12 VDC @ 1.5 A typ.
Weight	< 5 lbs (2.27 kg)
Size (L x W x H) ²	9.0" x 4.8" x 1.5"

¹Specifications are typical and subject to change without notice

² Excluding Detector, DC and RF input connector



ELECTRICAL AND PERFORMANCE SPECIFICATIONS (+25°C)

After a one hour warm-up period, the R15DET module will satisfy the following specifications.

Electrical Characteristics ¹	Description
Frequency Range	50 to 75 GHz
Detector Return Loss	15 dB typ.
Detector Flatness	± 3dB typ.
Detector Output	250mV/mW typ.
CW Input Power	+20 dBm max.

Module Characteristics ¹	Description
Interface RF Input Flange Detector Output	MIL-F-3922/67B-008 (UG 387/U) BNC(f)
Temperature	+ 20 to +30° C
Weight	< 10 oz (284 g)
Size (L x W x H) ²	3.8" x 1.1" x 0.8"

¹Specifications are typical and subject to change without notice

²Excluding BNC (f) connector

ORDER INFORMATION

Order Information	
R15RFT	WR-15 Reflectometer Module w/ Detector & 4 Filters

Standard Accessories	
R15DET	Transmission Detector, WR-15, 50 to 75 GHz
R15RFT-FL1	WR-15 BPF, 50 to 75 GHz
R15RFT-FL2	WR-15 BPF, 50 to 58 GHz
R15RFT-FL3	WR-15 BPF, 57 to 75 GHz
R15RFT-FL4	WR-15 BPF, xx to xx GHz
WGS01	Waveguide Short
V00DCBC1	1 m DC power cable, Banana Plug to 7-Pin Circular Jack Connector