



WR15 WR12 WR10 WR08 WR06 WR05 WR03 WR02.2

S05MS Series
WR05 Frequency Extension Modules
140 to 220 GHz

DESCRIPTION

The S05MS Series will expand your existing microwave Signal Generator capabilities to conduct measurements in WR-05 (140-220 GHz). These frequency extension modules easily connect to the output of a signal generator providing a high performance source for your DUT characterization activities. Characterize the DUT with the confidence that it will produce accurate results with superior performance of output power, spurious and harmonics. Specialized part numbers are available to avoid using an external power supply.



HIGHLIGHTS

- Modular design
- High Output Power of -9 dBm
- Microwave synthesizer determines frequency accuracy and resolution
- Phase noise adheres to 20 log (n) degradation
- Adjustable Height Control
- Optional power supply configuration for PSG
- Full continuous waveguide band coverage
- RoHS compliant

APPLICATIONS

- Maximum power with close proximity connections
- Ample power for most test conditions
- Precise setting of mm-wave frequencies
- Spectral purity enables phase noise measurements
- Convenient connections to DUT on test benches
- Simplify setup by using synthesizer as power supply
- Flexibility to handle multiple applications
- Environmentally friendly



ELECTRICAL AND PERFORMANCE SPECIFICATIONS (+25°C)

After a 0.5 hour warm-up period, the S05MS module will satisfy the following specifications.

Electrical Characteristics ¹	MIN	TYP	MAX
System Operating Frequency	140	--	220
RF out (dBm) typ. ²	-13	-9	-5
Higher order output harmonics (dBc) typ. ³	--	< -20	--
In-Band Spurious (dBc) typ. ⁴	--	≤ -20	--
RF in VSWR	--	≤ 2.0	--
RF out VSWR	--	≤ 1.7	--
Operating Temperature Range	+20° C	+25° C	+30° C

Module Characteristics ¹	Description
Test Port, System Output Interface ⁵	WR-05
RF System Input	SMA(f)
RF Input Frequency	11.6 to 18.4 GHz
RF Input Power	+10 dBm ± 1.5 dB
RF Input Damage Level	+20 dBm
RF Multiply Factor	x12
DC (+12 VDC) Power Requirements	+1.5 A, typ.
Size (L x W x H) ⁶	5.33" × 4.25" × 2.70"
Weight	< 2 lbs

¹ Specifications are typical and subject to change without notice

² As there are no internationally recognized power standards above 110 GHz, any power data supplied above 110 GHz is traceable only to OML's Calorimeter

³ As relates to the desired output frequencies. Applicable only with Keysight PSG & 8360 series synthesizers and Anritsu MG36xx, 68xxx/69xxx & 67xx series synthesizers.

⁴ In-band mixing products. Typically ≤ -15 dBc in the lower 10% of the waveguide band. Applicable only with Keysight PSG & 8360 series synthesizers and Anritsu MG36xx, 68xxx/69xxx & 67xx series synthesizers.



⁵ Test Port Flange Configuration is compatible with MIL-DTL-3922/67D (UG387/U-M)

⁶ Height excludes the adjustable rubber feet length and depth dimension excludes the output waveguide length



TYPICAL PERFORMANCE

The following typical performance is possible with the S05MS Series modules.

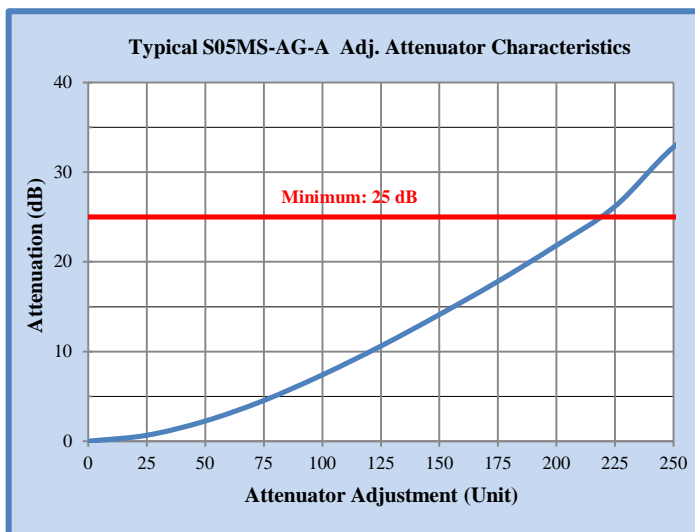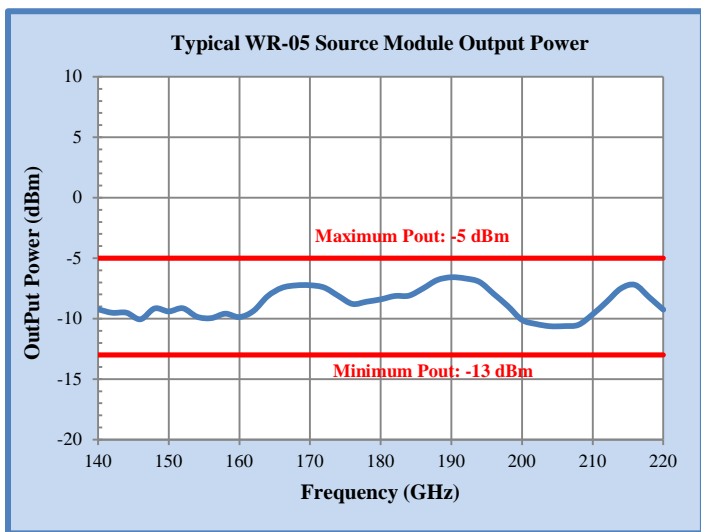

ORDER INFORMATION

Model	Description
S05MS	WR-05 Source Module Accessories: DC power cable, Dual Banana Plug to 7 Pin Circular Bayonet Plug (V00DCBC1)
S05MS-AG	WR-05 Source Module, Option AG (Keysight DC power cable) Accessories: DC power cable (V00DCDC2), RF Cable SMA (m/m) (V00LOIF)
Option -A	Adds 0 to 25 dB Manual Adjustable Attenuator to the RF Path
Option -EA1¹	Adds 0 to 20 dB typical Electronic Adjustable Attenuation to the RF Path
Option -EA2¹	Adds 0 to 40 dB typical Electronic Adjustable Attenuation to the RF Path
Option -EA3¹	Adds 0 to 60 dB typical Electronic Adjustable Attenuation to the RF Path

¹Contact Factory for Mechanical Dimensions and availability

MECHANICAL DIMENSIONS (If necessary, contact OML for more detailed drawings)

